



Turn the Space
Under Your Deck
Into a Dry, Beautiful
Outdoor Living Area





Under Deck Systems – Built for Performance & Style



UNDER DECK SYSTEM

Create a clean, finished look while protecting the area below from snow, rain, moisture, and debris.

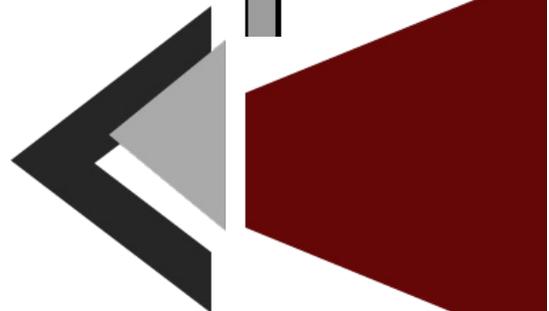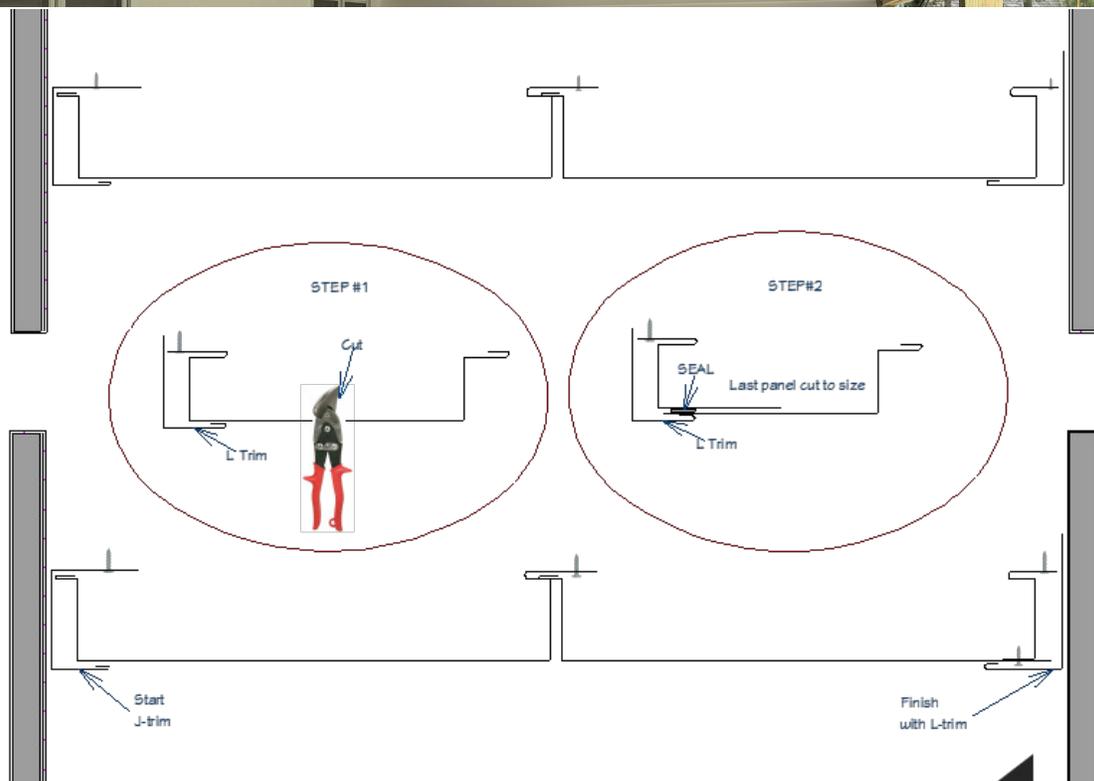

Under Deck Systems – Built for Performance & Style





UNDER DECK SYSTEM

Upgrade your deck with a professional Under Deck Ceiling System using premium 24 Gauge metal soffit panels from Atlantic Metal. Create a clean, finished look while protecting the area below from snow, rain, moisture, and debris.


Under Deck Systems – the Panel



Under Deck Systems – the Trim

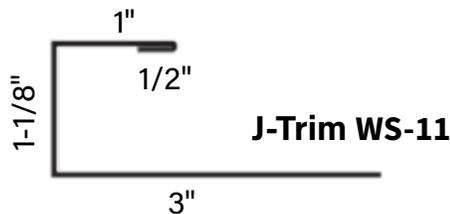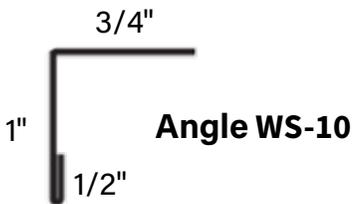

10x1 Pancake Head Type

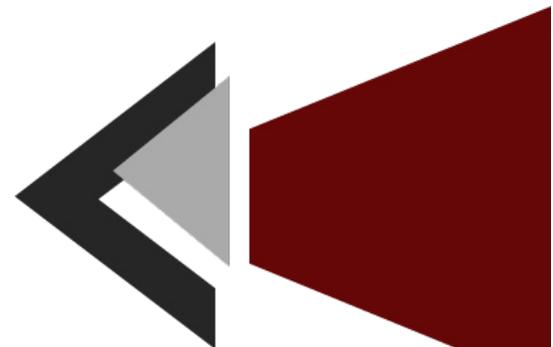


PRODUCT INFORMATION



UNDER DECK SYSTEM

Upgrade your deck with a professional Under Deck Ceiling System using premium 24 Gauge metal soffit panels from Atlantic Metal.

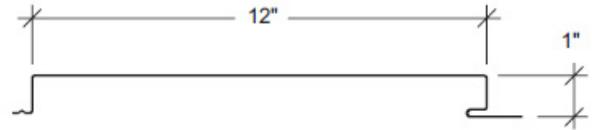

SECTION PROPERTIES								
			NEGATIVE BENDING			POSITIVE BENDING		
PANEL	Fy	WEIGHT	lxe	Sxe	Maxo	lxe	Sxe	Maxo
GAUGE	(KSI)	(PSF)	(IN.4/FT.)	(IN.3/FT.)	(KIP-IN.)	(IN.4/FT.)	(IN.3/FT.)	(KIP-IN.)
24	50	1.31	0.0270	0.0309	0.9248	0.0178	0.0296	0.8871

NOTES:

1. All calculations for the properties of Soffit 12" panels are calculated in accordance with the 2001 edition of the North American Specification For Design Of Cold-Formed Steel Structural Members.
2. lxe is for deflection determination.
3. Sxe is for bending.
4. Maxo is allowable bending moment.
5. All values are for one foot of panel width.


ALLOWABLE UNIFORM LOADS IN POUNDS PER SQUARE FOOT

24 Gauge (Fy = 50 KSI)								
SPAN TYPE	LOAD TYPE	SPAN IN FEET						
		2.0	2.5	3.0	3.5	4.0	4.5	5.0
SINGLE	POSITIVE WIND LOAD	147.9	94.6	57.6	36.3	24.3	17.1	12.4
2-SPAN	POSITIVE WIND LOAD	142.2	92.3	64.6	47.7	36.6	29.0	23.5
3-SPAN	POSITIVE WIND LOAD	174.9	114.1	80.1	59.2	45.5	32.2	23.5
4-SPAN	POSITIVE WIND LOAD	164.2	106.9	75.0	55.4	42.6	33.7	24.9

NOTES:

1. Allowable loads are based on uniform span lengths.
2. POSITIVE WIND LOAD is limited by bending, shear, combined shear & bending.
3. Above loads consider a maximum deflection ratio of L/180.
4. The weight of the panel has not been deducted from the allowable loads.
5. THE ABOVE LOADS ARE NOT FOR USE WHEN DESIGNING PANELS TO RESIST WIND UPLIFT
6. The use of any accessories other than those provided by the manufacturer may damage panels, void all warranties and will void all engineering data.
7. Please contact manufacturer or manufacturer's website for most current allowable wind uplift loads.

The Engineering data contained herein is for the expressed use of customers and design professionals. Along with this data, it is recommended that the design professional have a copy of the most current version of the North American Specification for the Design of Cold-Formed Steel Structural Members published by the American Iron and Steel Institute to facilitate design. This Specification contains the design criteria for cold-formed steel components. Along with the Specification, the designer should reference the most current building code applicable to the project jobsite in order to determine environmental loads. If further information or guidance regarding cold-formed design practices is desired, please contact the manufacturer.

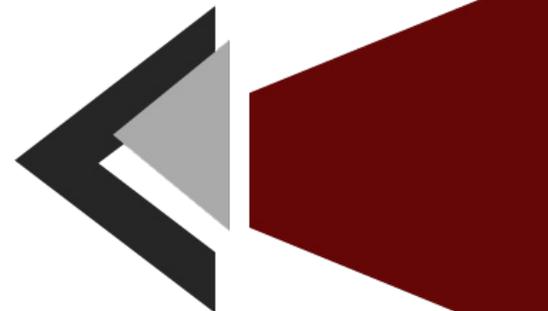

STANDARD STOCKED ARCHITECTURAL COLORS



Acasia Wood W23



Knotty Pine W69




Wooden Spot W77




Concrete X23




Galvalume A755

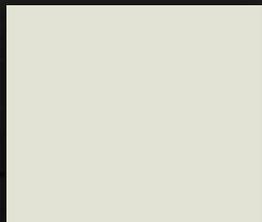


Polar White H2070

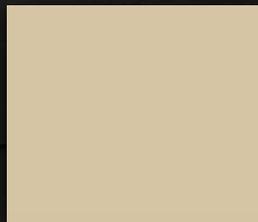

Light Stone E7090

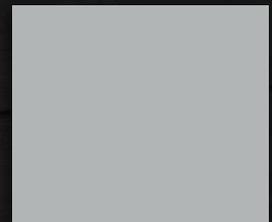

Slate Gray L2880

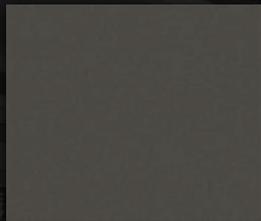


Charcoal Gray L2880



Dark Blue D2060




Hawaiian Blue B2090



Dark Bronze K2360



Colonial Red R2060



Fern Green D2970



Matte Black B2360



Prewathered
Galvalume L2890



300 Penn Ave, Levittown, PA 19057
(215) 942-46-43 | info@metalbends.com



Discover More