


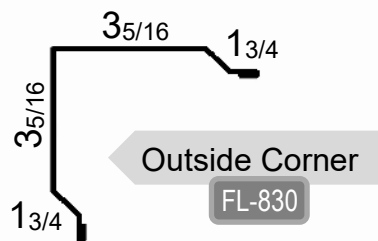
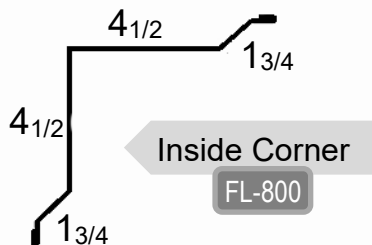
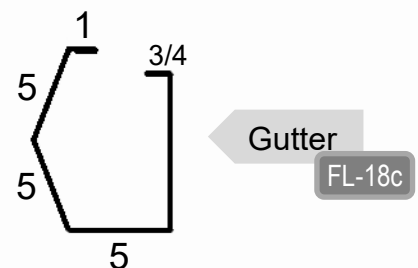


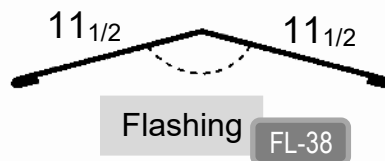




Atlantic Metal
Roofing Product LLC

5.25 PANEL

The 5.22 panel offers versatility and functionality for roofs and walls.

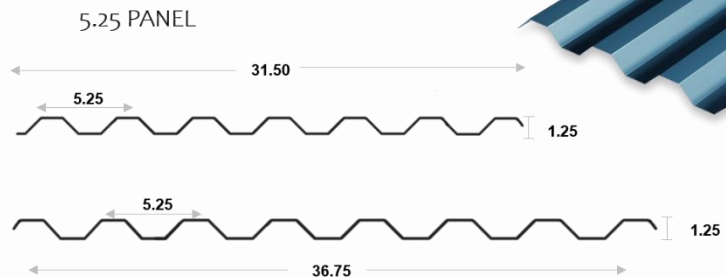




Atlantic Metal
Roofing Product LLC

5.25 PANEL

The 5.22 panel offers versatility and functionality for roofs and walls.

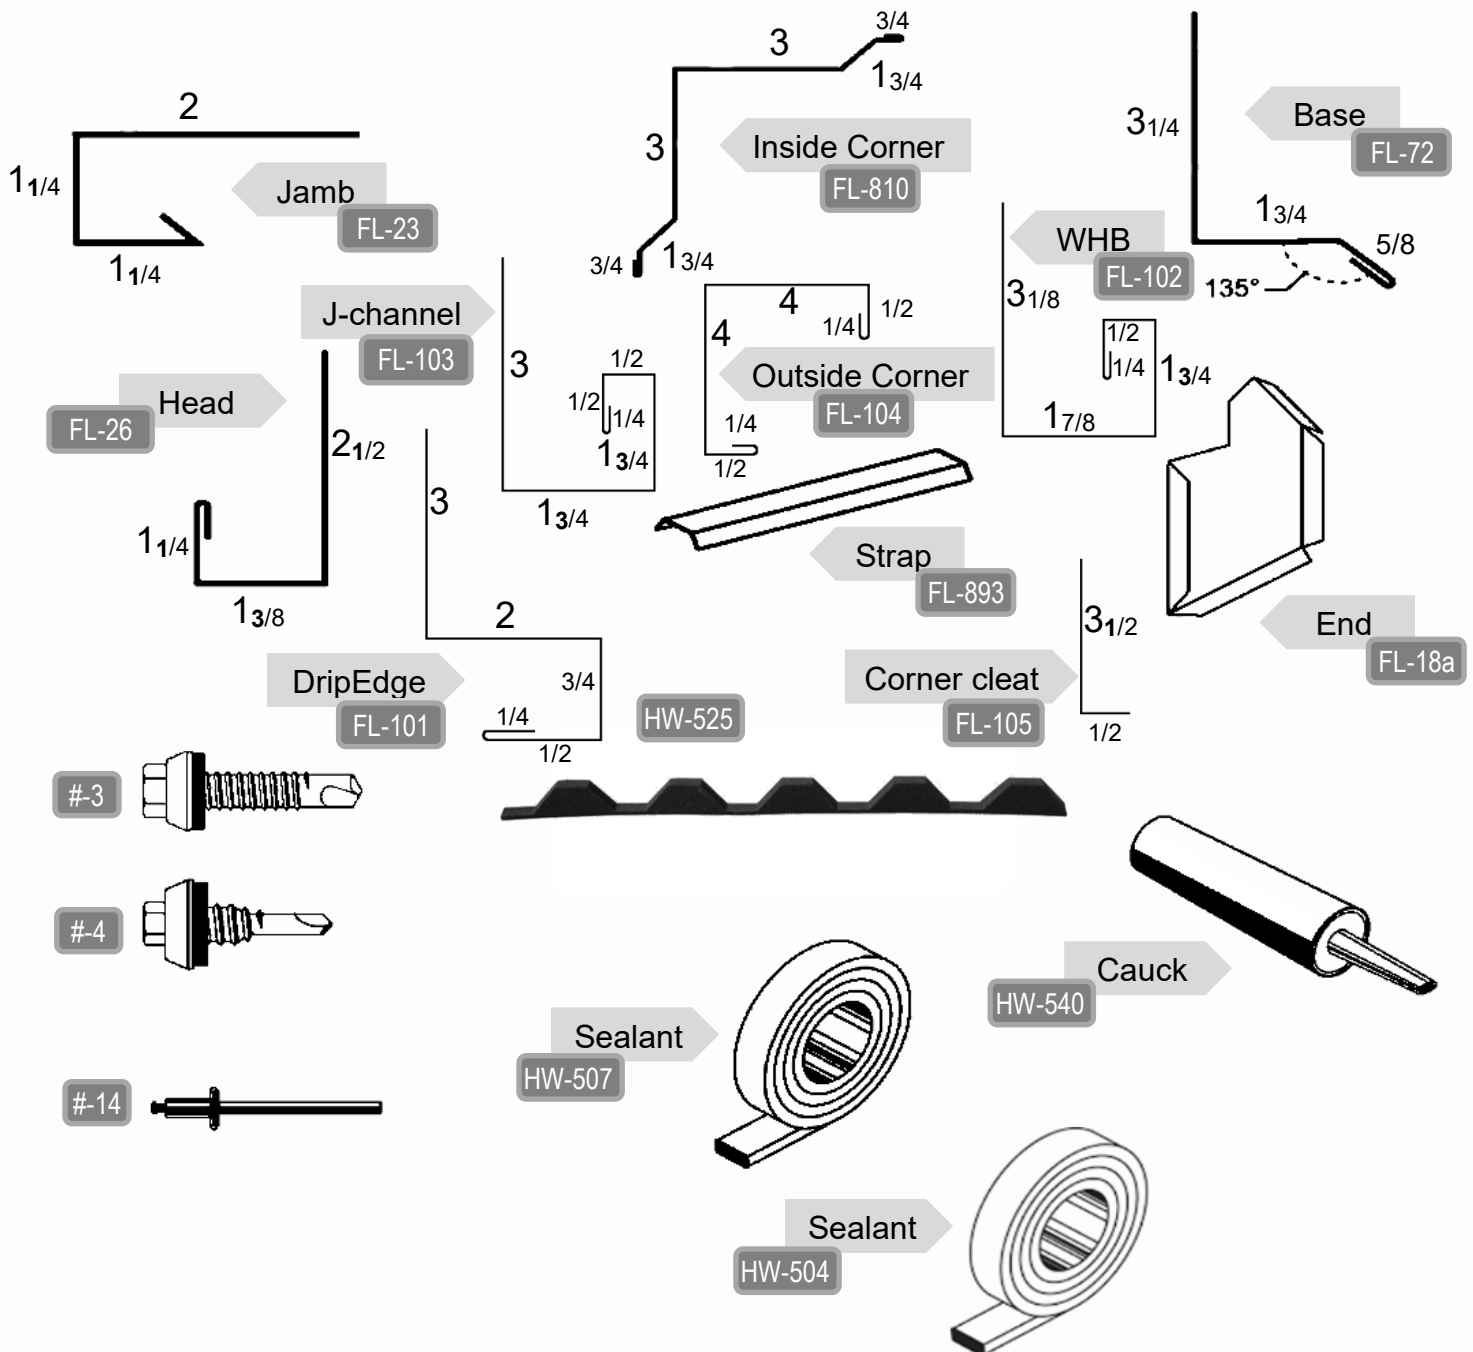

300 Penn Ave, Levittown, PA 19057
atlanticmetalbendsllc@gmail.com
www.metalbends.com (215) 942-46-43




Atlantic Metal
Roofing Product LLC

5.25 PANEL

The 5.22 panel offers versatility and functionality for roofs and walls.

Rib Distance (Pitch) 5.25"
Rib Height: 1.25"
Available Gauges: 24, 26
Fasteners: Exposed
Panel Length: 1' to 52'
Coverage: 31.5" to 36.75"

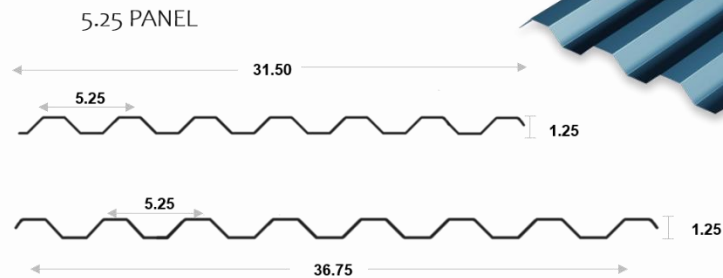

The 5.25 rib metal wall panel is 1.25 inches deep with symmetrically spaced ribs at 5.25 inches on center making it ideal for use in a variety of applications. 5.25 rib wall panels have a trapezoidal profile and can be installed either vertically or horizontally for a more dramatic effect, particularly in architectural applications.

This 5.25 inch x 1.25 inch ribbed wall panel is also available in a wide variety of coatings and colors



Section Properties			Top in Compression			Bott. In Compression		
gauge	fy	wt	ix	sx	ma	ix	sx	ma
	(ksi)	(psf)	(in ⁴ /ft)	(in ³ /ft)	(kip-in)	(in ⁴ /ft)	(in ³ /ft)	(in ⁴ /ft)
26	80	0.86	0.0658	0.0743	2.6653	0.0621	0.0624	2.2419
24	50	1.10	0.0917	0.1090	3.9168	0.0911	0.0979	3.5208

Notes:

1. Effective section properties are calculated in accordance with the 2004 North American Specifications for the design of Cold-Formed Steel Structural Members
2. Ix is for the determination of deflection.
3. Sx and Ma are for the stress determination.

300 Penn Ave, Levittown, PA 19057
atlanticmetalbendsllc@gmail.com
www.metalbends.com (215) 942-46-43

